


- NOTES**
1. CONTAINMENT MOUNTED ABOVE SUSPENDED CEILINGS SHALL BE MOUNTED 'FACE UP' ON SUITABLE BRACKETRY.
  2. MANUFACTURERS APPROVED FIXING BRACKETS SHALL BE USED THROUGHOUT, OBSERVING RECOMMENDED SPACINGS.
  3. USE MANUFACTURERS PRE-FABRICATED BENDS AND ANGLE PIECES AT ALL TIMES.
  4. CONTAINMENT SIZES AS SHOWN ON LEGEND UNLESS OTHERWISE INDICATED ON THE DRAWING.
  5. LIASE WITH HVAC ENGINEER AT START OF PROJECT TO ENSURE CO-ORDINATION BETWEEN SERVICES.
  6. CONTAINMENT SHALL BE INSTALLED AT HIGH LEVEL ABOVE THE SUSPENDED CEILING. NO CONTAINMENT SHALL BE REMOVED, RE-ROUTED AND RE-INSTALLED AT CONTRACTORS COST.
  7. WHERE CONTAINMENT PASSES THROUGH WALLS, FIRE-RATED PARTITIONS, OR COMPARTMENTS, THE CONTRACTOR SHALL ALLOW FOR ALL PENETRATIONS TO BE SEALED THROUGH. TRUNKING SHALL ALSO HAVE FIRE RATED INTUMESCENT MATERIAL INSTALLED WITHIN THE TRUNKING, AFTER ALL CABLING HAS BEEN INSTALLED.
  8. ALL CONTAINMENT SHALL HAVE EARTH LINKS AT JOINS.

**LEGEND**

- EXISTING MAIN BUSBAR (INDICATIVE ROUTE)
- - - EXISTING LIGHTING BUSBAR SUPPLIED FROM MAIN BUSBAR (INDICATIVE)
- NEW LIGHTING BUSBAR SUPPLIED FROM MAIN BUSBAR

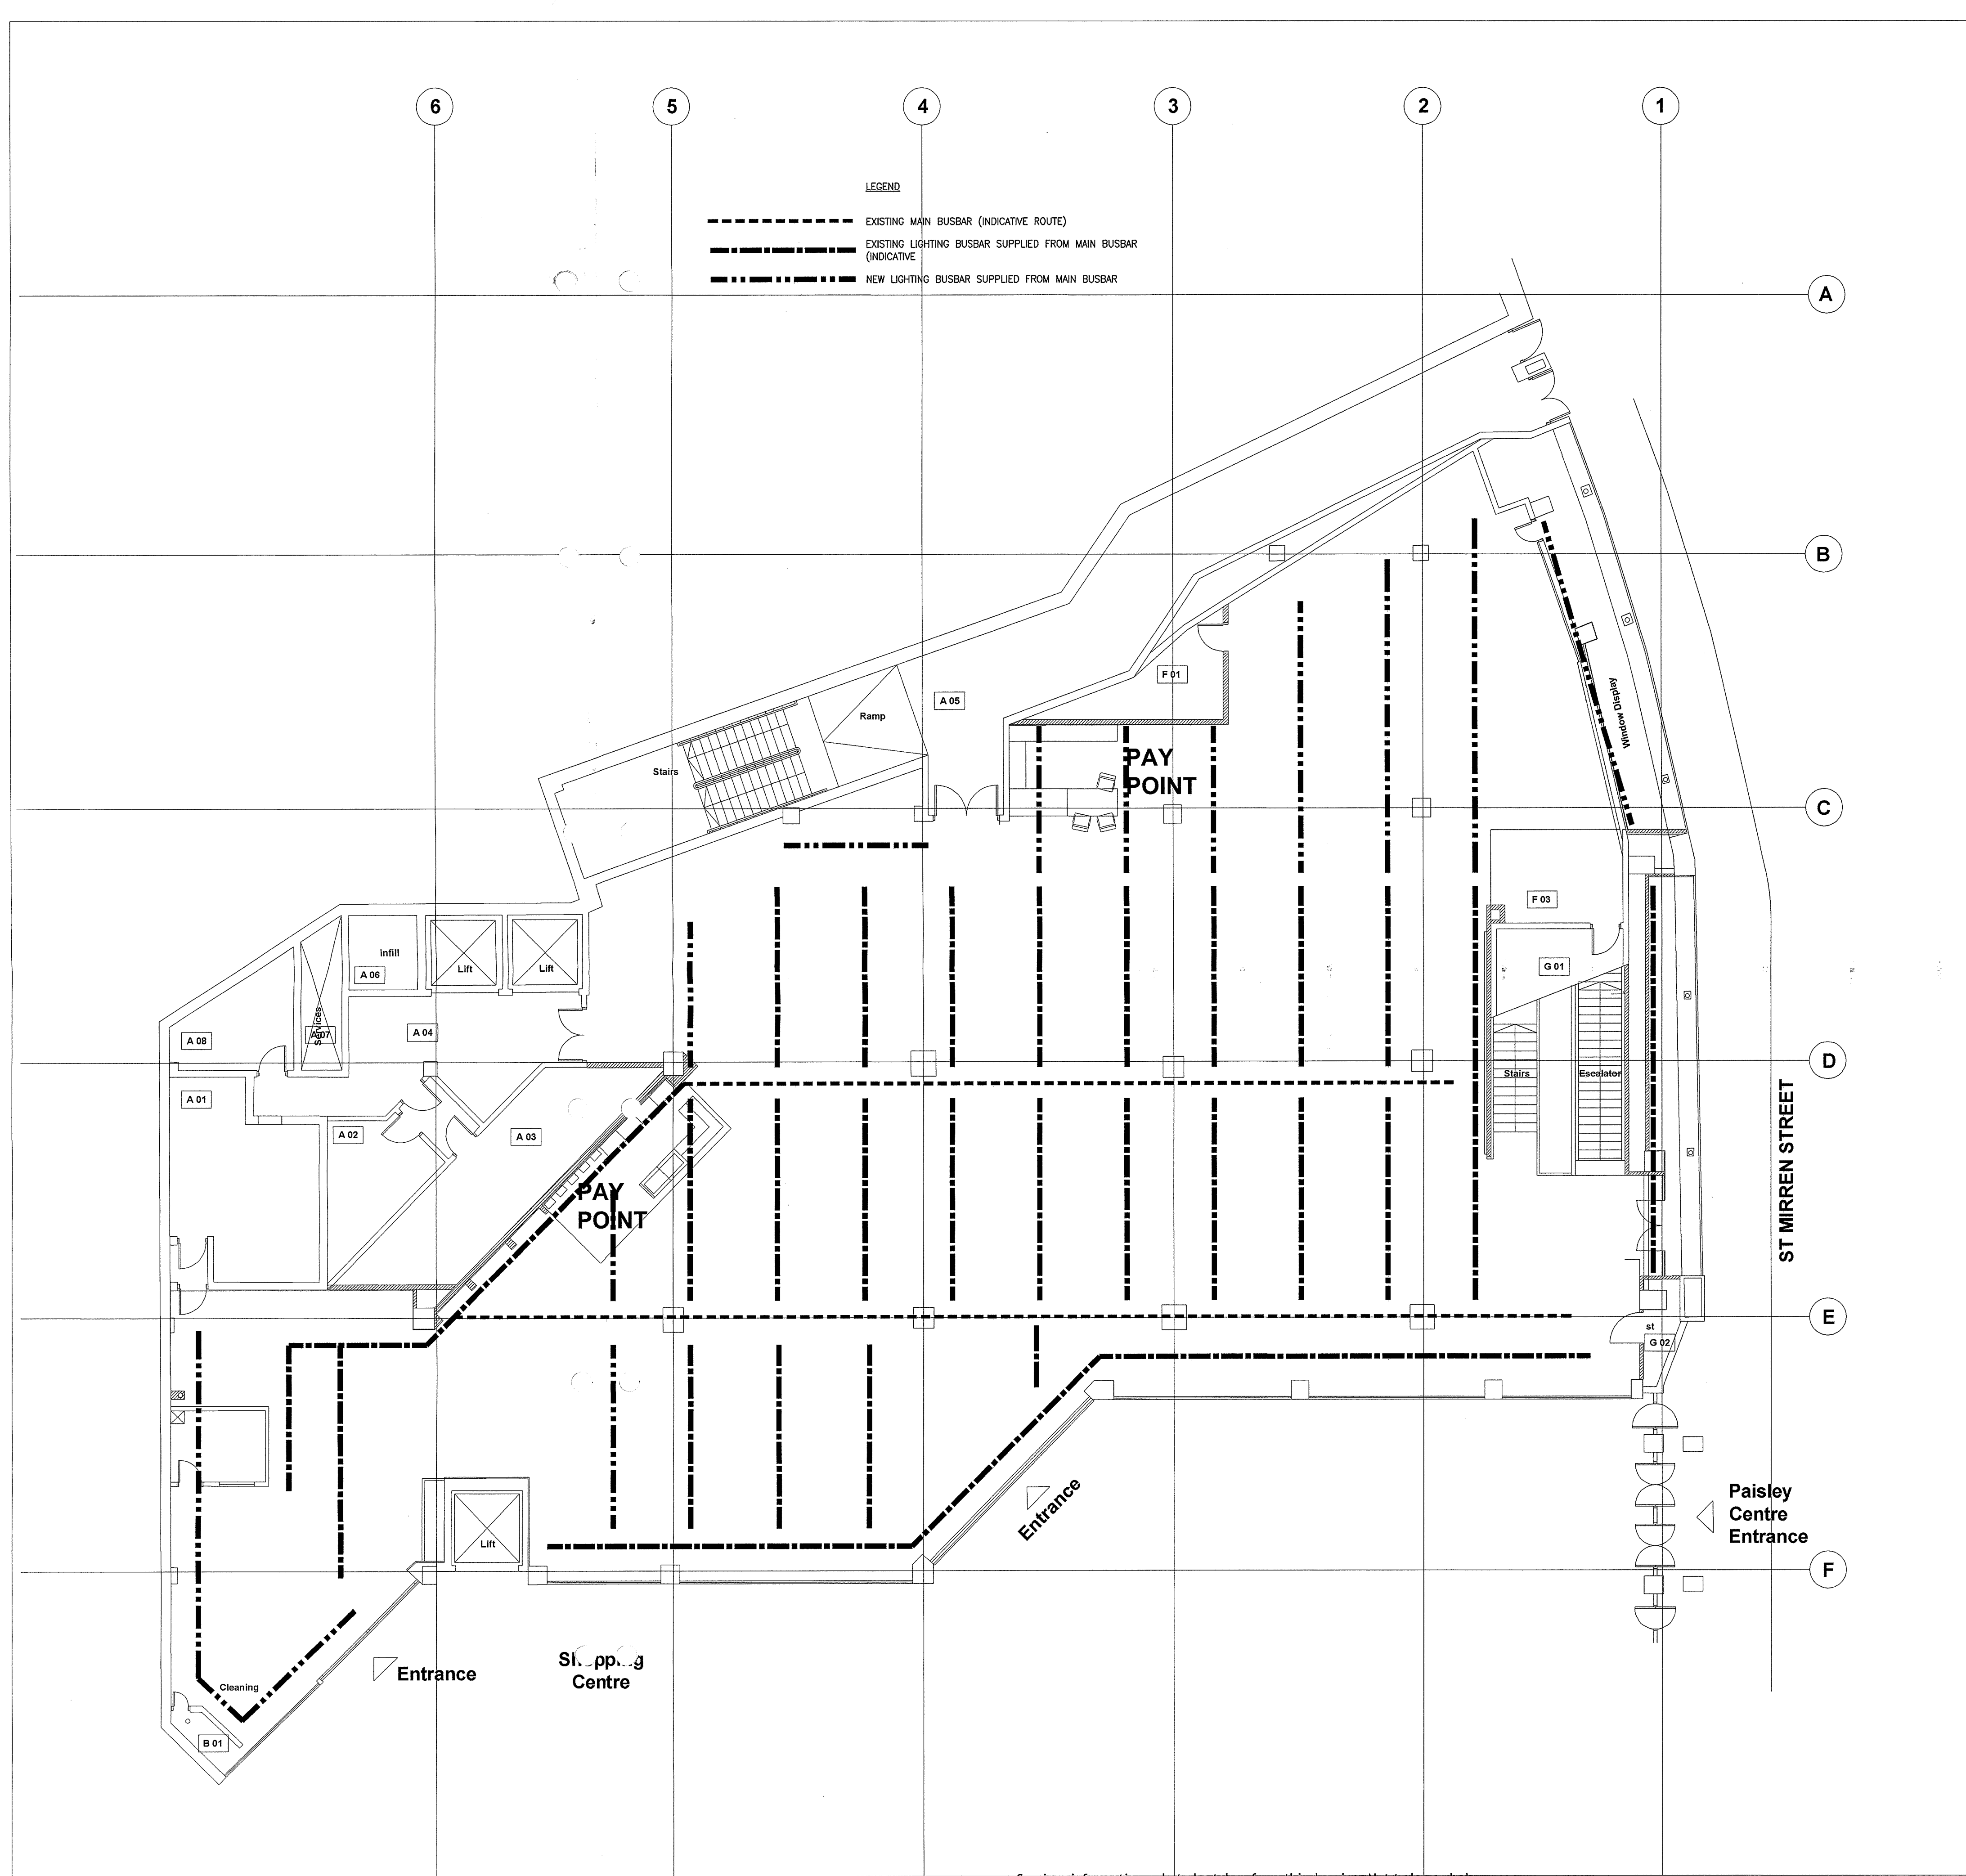


REV	DESCRIPTION	CHK	DATE
A	REVISED TO NEW LAYOUT		Feb '17

Project:  
**CO-OP REFRUBISHMENT PAISLEY**

Services:  
**PROPOSED CONTAINMENT LAYOUT LEVEL 1**

Originator : IS Scale : 1:100@A1  
Checked : JL Date : OCTOBER 2016

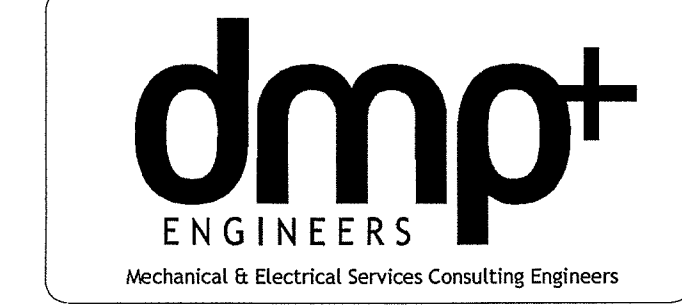

21-23 Blairtummock Place  
Panorama Business Village  
Glasgow G33 4EN  
Tel: 0141 773 6820  
Fax: 0141 773 6849  
Email: glasgow@dmpengineers.co.uk

**CONSTRUCTION**

Services information only to be taken from this drawing. Not to be scaled